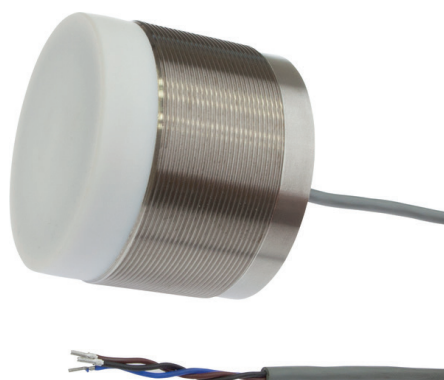


IN80C916
INDUCTIVE SENSORS • INCREASED AMBIENT TEMPERATURE

sensor inductive, M80x1.5 66long, Non-flush, Sn: 50, 10-35V DC, -40-120°C, PNP NO, Cable 2m Silicone, IP65, Stainless steel 1.4305


MECHANICAL FEATURES

Active area material of sensor	Polytetrafluorethylene (PTFE)
Alignment of cable entry	Axial
Ambient temperature	-40 °C ... 120 °C
Cable infeed	Axial
Cable length	2 m
Degree of protection (IP)	IP65
Design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Material of cable sheath	Silicone
Mechanical mounting condition for sensor	Non-flush
Pressure-proof	-
Sensor length	66 mm
Thread length	40 mm
Thread pitch	1.5 mm
Thread size, metric	80

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	25 %
No-load current	8 mA
Operating voltage	10 V ... 35 V
Rated switching current	150 mA
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Switching distance	50 mm
Switching frequency	50 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC

OTHER FEATURES

Areas inquiry	+
---------------	---


Other

Packaging dimensions	138.0mm x 95.0mm x 210mm
Shipping weight	
Tariff code	85365019

Classification

ipf product group	700
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

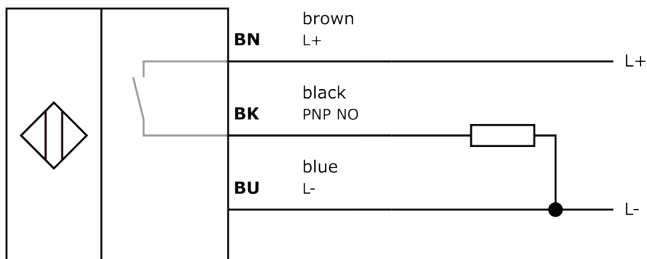

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.